| (51) International Patent Classification [5] : G11C 11/40 | A1 | (11) International Publication Number: **WO 95/15562** |
| | | (43) International Publication Date: 8 June 1995 (08.06.95) |

(54) Title: A CAPACITORLESS DRAM DEVICE ON SILICON-ON-INSULATOR SUBSTRATE
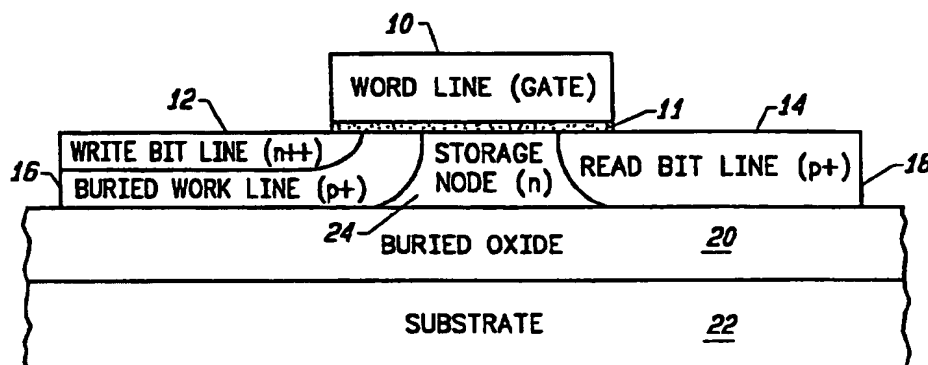
(57) Abstract

A DRAM device has a first semiconductor region (18) of one conductivity on the silicon film of a silicon-on-insulator substrate (22). A second (16) and a third (14) semiconductor region of the opposite conductivity are formed in the first semiconductor region (18). A fourth semiconductor region (12) of the same conductivity type as the first semiconductor region (18) is formed within the second semiconductor region (16) with higher doping concentration. A insulating layer (11) is formed on the semiconductor surface. On top of the insulating layer (11), a gate electrode (10) is formed and is at least partially overlapped with the first (18), the second (16), the third (14), and the fourth (12) semiconductor region. A storage node (24) is formed in the first semiconductor region (18) between the second (16) and the third (14) semiconductor region where the information is stored. The amount of charge stored in the storage node (24) is controlled by a first transistor including the fourth semiconductor region (12), the second semiconductor region (16), the storage node (24), and the gate electrode (10).

A CAPACITORLESS DRAM DEVICE ON
SILICON-ON-INSULATOR SUBSTRATE

BACKGROUND OF THE INVENTION

This invention relates generally to semiconductor devices, and more particularly the invention relates to dynamic random access memories (DRAM) and cell structures.

Dynamic random access memory (DRAM) is a major semiconductor product and has been the "technology driver" for the semiconductor industry. The commercial success of DRAM results from the smallness of the memory cell unit, which makes high storage density and low cost possible. DRAM cell contains one transistor for controlling READ/WRITE operations and one capacitor for charge storage. The transistor uses the smallest feature size transistor available thus drives the front-end technology such as lithography, transistor scaling and isolation. The technology developed for DRAM can later be used for fabricating other semiconductor products.

However the challenge of DRAM technology of 64 megabits and beyond has been more on how to build a large capacitor in a small area rather than on transistor scaling. The storage capacitor needs about 30fF to provide enough signal-to-noise ratio. Novel dielectric-constant material or novel memory cell structure become the main focuses for current DRAM technology. Besides the fact that the fabrication process of 64 megabits DRAM and beyond is becoming more and more difficult, the development and manufacturing cost is increasing tremendously yet the technology developed for DRAM is not extendible to other semiconductor products. The limit of $C_S=30fF$ is not likely to be lessened if the principles of the cell operation, the charge-sharing between the storage capacitor and the READ (bit line) capacitor (i.e., the single-event upset READ scheme), remain unchanged, and will only become more stringent for gigabits DRAM technology.

The concept of "gain cell" has been proposed to alleviate the dependence on large cell capacitance. Many gain cells proposed use an additional transistor (e.g., JFET   Complementary MOS   , or BJT   ) to amplify the charge stored in a smaller capacitor whose size is lowerbounded by soft-error consideration

(~10fF). However these gain cells either take larger cell layout area or involve complicated fabrication process, both of which increase development and manufacturing costs. Another category of gain cells use the concept of "dynamic threshold ." These gain cells do not need large storage capacitors, however, gain cells based on the dynamic threshold operation are sensitive to the processing condition and maybe difficult to manufacture.

SUMMARY OF THE INVENTION

This invention provides a capacitorless DRAM device on silicon-on-insulator substrate with large read current, good immunity to α-particle-induced single-even-upset, and simple fabrication process. The size of the capacitorless DRAM device is that of a single transistor, which makes it very attractive for ultra high density memory applications. Using SOI substrate not only avoids many problems that make prior art devices impossible or impractical but also greatly simplifies the fabrication process. Since the capacitorless DRAM device employs the operation concept similar to dynamic threshold devices , the large capacitor is not needed. In the capacitorless DRAM the charge is stored in the front surface of the thin silicon film of silicon-on-insulator substrate. The stored charge modulate the function of the read transistor (e.g. the threshold voltage of a MOSFET). The amount of charge read in the capacitorless DRAM cell can easily exceed the amount of charge read in ordinary DRAM cell (~100fC).

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a cross section view of a capacitorless DRAM cell in accordance with one embodiment of the invention, and FIG. 1B is a schematic diagram of the DRAM cell.

FIG. 2 is an energy band diagram of the DRAM cell in a "0" storage state.

FIG. 3 is an energy band diagram of the DRAM cell during a write operation.

FIG. 4 is an energy band diagram of the DRAM cell with a "1" stored therein.

FIG. 5 is an energy band diagram of the DRAM cell during a read operation.

FIG. 6 is an energy band diagram where the DRAM cell is purged.

FIG. 7 illustrates transient RBL current of the DRAM cell during read/write cycles.

FIG. 8 illustrates read (RBL) current as a function of read (WL) voltage with and without stored electrons.

FIG. 9 is a plan view of an array of DRAM cells in accordance with an embodiment of the invention.

FIG. 10 is a schematic diagram of the array of DRAM cells of FIG. 9.

FIG. 11 is a schematic diagram of an alternative embodiment of the array of DRAM cells of FIG. 9.

FIG. 12 is a plan view of an array of DRAM cells in accordance with another embodiment of the invention.

FIG. 13 is a cross section view of the DRAM device array of FIG. 12 taken along a bit line, BL.

FIG. 14 is a schematic diagram of the DRAM device array of FIG. 12.

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENT

In FIG. 1A the cross-sectional view of the capacitorless DRAM device, it has a word line (WL) formed by the gate 10 formed on gate insulator 11, an n++ write bit line (WBL) 12, a p+ read bit line (RBL) 14, and a p+ buried word line (BWL) 16. The device is formed in a semiconductor layer 18 on a first insulating layer 20 which insulates the device from the supporting substrate 22. The substrate and insulating layer can be integral and in a conventional silicon or sapphire structure. This device can also be realized by using the opposite conductivity type semiconductor in each region of FIG. 1. The write transistor is composed of WBL, BWL, the floating body, and the gate. The read transistor is composed of the RBL, the floating body, storage node 24, the BWL, and the gate (FIG. 1B). They are integrated together within one compact structure. Compared to ordinary DRAM cells, the fabrication process is simpler. Though the cross sectional view of the present invention looks similar to the device taught in U.S. Patent 4,395,723, they are different in important ways. In the present invention, node BWL that resembles the floating storage nodes 102 in FIG. 1A, 202 in FIG. 2A, 302 in FIG. 3A and 402 in FIG. 4A of U.S. Patent

4,395,723 is not the storage node. It is electrically connected to the peripheral circuit. In the present invention the storage node is the floating body that resembles nodes 104 in FIG. 1A, 204 in FIG. 2A, 304 in FIG. 3A, and 404 in FIG. 4A, which in US Patent 4,395,723 are biased at ground or V_{CC}. For the device taught in US Patent 4,395,723 the storage node is built on the substrate a region of the opposite conductivity type semiconductor. Therefore the substrate needs low doping concentration which results in high resistivity (104 in FIG. 1A, 204 in FIG. 2A, 304 in FIG. 3A, and 404 in FIG. 4A in US Patent 4,395,723), and the storage node needs high doping concentration which results in high junction capacitance (C_1 in FIG. 1A and similarly in FIGs. 2A, 3A, and 4A in US Patent 4,395,723). These are significant shortcomings which make the device taught in US. Patent 4,395,723 impractical. The transistor that provides the read current (e.g. 120 to 106 in FIG. 1A, 220 to 206 in FIG. 2A, 320 to 306 in FIG. 3A, and 420 to 406 in FIG. 4A in US. Patent 4,395,723) are vertical transistors (the source is situated below the drain) requiring the current to flow through the lightly doped, high-resistivity, region. This added resistance significantly reduces the available current in comparison with the conventional lateral transistors. In addition, the bit line of the memory (120 in FIG. 1A, 220 in FIG. 2A, 320 in FIG. 3A, and 420 in FIG. 4A in US. Patent 4,395,723) has large junction capacitance (C_1 in FIG. 1A and similarly in FIGs. 2A, 3A, and 4A in US. Patent 4,395,723) which further reduces the speed performance. A third shortcoming is the difficulty of routing the required negative voltages (Table 1 in US. Patent 4,395,723). Without silicon-on-insulator this would imply the use of a triple-well technology to isolate the devices carrying the negative voltage, resulting in more complex circuit design, larger chip size, lower performance, and higher cost. Finally α-particle induce single-event-upset is a problem because of the large storage node junction.

In the present invention the storage region is not formed on the substrate, but is the starting material itself. The present invention solves all these problems through the use of silicon-on-insulator substrate. On a silicon-on-insulator substrate the devices carry negative voltages can be isolated (by oxide, not by pn junctions) from those carrying positive voltages without special precautions. The immunity to α-particle-induced single-event-upset is improved because the junction area is reduced and the path from the charge generated by the α-particle to the storage node is cut off. Furthermore, normal lateral transistors with low resistivity source and drain are used for read and write, the magnitude of the read current will not be degraded. Also the read bit line capacitance is smaller because it is connected to the junction capacitance on

the lightly-doped substrate (between RBL and the floating body). Large read current and small bit line capacitance are important factors in determining DRAM performance.

In the first embodiment, the memory device is operated according to Table 1:

Operation \ Node	WL	WBL	RBL	BWL	SUB
Purge	0		0		
Read	0.6	0.6		GROUND	GROUND
Hold	1.8		0.6		
Write "1"	3				
Write "0"		1.8			

TABLE. 1 An example of the operating voltages of the capacitorless DRAM device of accumulation mode.

The memory states "0" and "1" are distinguished by the amount of majority carriers injected from WBL into the storage node (accumulation mode operation), which is fundamentally different from the device proposed in U.S. Patent 4,395,723 in which the memory states of "0" and "1" are distinguished by the depletion of majority carrier out of the storage node (depletion mode operation). In this embodiment, when the capacitorless DRAM device is not performing read and write, i.e., in the holding state, the biasing voltages are: WL 1.8 V, RBL and WBL 0.6 V, and BWL 0 V. The positive WL voltage tends to accumulate the floating body. Since there is no electron supply to form the accumulation layer, a potential well is formed in the floating body (FIG. 2). In writing the capacitorless DRAM cell, WL voltage increases to 3 V. WBL is biased at 0.6 V for

writing a "1" and at 1.8 V (larger than 1.2 V will be enough) for writing a "0." With WL voltage at 3 V

and WBL voltage at 0.6 V for writing a "1", the write NMOSFET is turned and electrons inject from WBL

into the storage node to supply the accumulation layer at the front surface of the floating body until the

potential well is "filled," that is, fermi levels of the WBL and of the front surface of the floating body are

aligned (FIG. 3). The write time takes less than a few nano seconds. For writing a "0" WBL is biased at

1.8 V, electrons will be blocked by the barrier and the potential well remains empty (FIG. 3). After writing

the capacitorless DRAM device, WL returns to the holding voltage 1.8 V (FIG. 2 and 4).

The write mechanism of the capacitorless DRAM device is not limited to the MOSFET operation as

described in the example. Punchthrough and tunneling are also possible mechanisms that can be used for

the write operation. For some capacitorless DRAM device array layout BWL voltages can also be used for

write operations if BWLs are not common to the whole array but are laid out along the WL directions. In

fact it is advantageous of using both WL and BWL for the write operation because less WL voltage such

as 2.5 V is needed if BWL is biased at to 0.6 V during write.

For the read operation, WL is biased to 0.6V. The potential of the storage node is capacitively coupled

to the WL voltage thus the hole barrier is reduced. If the capacitorless DRAM device is in state "1" with

electrons in the front surface accumulation layer of the storage node, the read transistor will turn on when

WL is 0.6 V and a large hole current will flow from RBL to BWL to generate a signal to be detected at

RBL. If the capacitorless DRAM device is in state "0" with no electron in the front channel of the floating

body, the read transistor will not turn on when WL is 0.6 V and there is no current flow from RBL to BL

(FIG. 5). The operation of the read transistor can function either like a MOSFET or a BJT, depending on

the device design. For example, when WL is biased at the read voltage, if the voltage coupling from WL to

the floating body is strong such as in the case that the film is fully-depleted and that the band-bending of

the floating body is large, the read transistor behaves more like an MOSFET and the read operation is non-

destructive because the potential barrier for electrons residing in the front surface accumulation layer

remains high even the hole barrier at the back surface is low. If the voltage coupling from WL to the

floating body is weak as in the case the film is non-fully-depleted that the band-bending of the silicon film

is small. part of the floating body will be quasi-neutral and the read transistor behaves like a BJT. The read

operation is destructive because the electron barrier in the front surface accumulation layer is low when the hole barrier is low. In this case the holes are not necessarily flowing through the back surface of the silicon-on-insulator film from RBL to BWL.

In this embodiment, the capacitorless DRAM device has to be in state "0" before it can be written again. One way to achieve this is to employ destructive read, then the capacitorless DRAM device is ready for writing after read. If the read operation is non-destructive, an optional purge operation can be employed. Purge can be done by applying 0 or negative voltage to WL to expel the electrons out of the potential well. Increasing BL voltage can also help the efficiency of purging the cell and avoid heavy turn-on of the read transistor (FIG. 6). The memory operation of the capacitorless DRAM device in the first embodiment is demonstrated in FIG. 7 and 8 by the numerical simulations.

In the second embodiment, the capacitorless DRAM cell can be operated in the depletion mode according to Table 2:

Node \ Operation	WL	WBL	RBL	BWL	SUB
Read	-1.5				
Hold	0	0		GROUND	GROUND
Write "1"	3		-1		
Write "0"		2			

TABLE. 2 An example of the operating voltages of the capacitorless DRAM device of depletion mode.

For this embodiment the mode of operation is similar to the prior art device in US. Patent 4,395,723 but the storage node is different. In the holding state WL is biased at 0 V. In writing "0" WBL is biased at 2 V and WL is biased at 3 V to turn on the write NMOSFET so that the floating body is charged to 2 V to increase the threshold voltage of the read PMOSFET. In writing a "1" WBL is biased at 0 V and WL is biased at 3 V so that the floating body is charged to 0 V. For reading, WL is biased at -1.5 V

and RBL is biased at -1 V. The "0" and "1" states are thus distinguished with different threshold voltage of the read transistor. The read operation is non-destructive. This embodiment requires the voltage coupling from WL to BWL to be stronger than the voltage coupling from WL to the floating body. However BWL usually has a higher doping concentration therefore a weaker voltage coupling from WL. One way to increase voltage coupling from WL to BWL is to use thinner oxide in the region between WL and BWL.

In the embodiment of the memory array architecture, the capacitorless DRAM device described above can be put into a two-dimensional contactless array shown in FIG. 9. The schematic diagram is shown in FIG. 10. If BWLs are grounded at all times they can be contacted through metal or polysilicide interconnect parallel to WL once every several rows. To fully explore the high speed performance of the capacitorless DRAM devices, using two metal lines per memory array column (one for RBL and one for WBL) is desirable so that the RBL has low capacitance. In considering the memory density however it is desirable to use one metal line per column. Since the read and write operations of the capacitorless DRAM device are quite independent, that is, during the read operation, WBL can be a high impedance node, and vise versa. The concept of "alternative metal scheme" can possibly be employed by sharing RBL and WBL with one metal with switching transistors to achieve one metal line per bit. For example, before the write cycle starts, BWL is charged to 0V through select transistor S_2 and the metal line. Then S2 is turned off and S_1 is turned on so that metal line is connected to WBL to perform write. The read cycle can be done similarly.

An another embodiment which focuses on improving the array density of the capacitorless DRAM device is to use one metal bit line for both RBL and WBL. In this way the memory cell size can be reduced to $4(F+a)^2$, where F is the minimum feature size and a is the alignment tolerance. For example, FIG. 12, 13, and 14 are the array layout, the array cross section along BLs, and the array schematic diagram. The operating voltages of this embodiment is listed in Table 3 :

9

W/BL's Functions	WL1 (selected)	BWL	RBL &WBL	WL2	Other WL's
HOLD	3	-1.5	0	1.5	3
READ "1"	0	-1.5	< 0		
READ "0"	0	-1.5	0		
PURGE	-1.5	0	~ 0		
WRITE "1"	3	0	0		
WRITE "0"	3	0	0.6		

Table 3 Operating voltages for the capacitorless DRAM device with $4(F+a)^2$ unit cell size.

Since two neighboring WLs (WL1 and WL2 in FIG. 12 and 14) are sharing with one BWL, when WL1 in FIG. 12 is selected, WL2 has to be biased at 1.5 V to avoid data disturbance. The price paid for using one bit line for both RBL and WBL is that the read and write operations can not be optimized separately, and the bit line voltage swing is limited to about 0.6 V to avoid disturbing the data in memory devices in unselected rows.

While the invention has been described with reference to specific embodiments, the description is illustrative of the invention and is not to be construed as limiting the invention. Various modifications and applications may occur to those skilled in the art without departing from the true spirit and scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A capacitorless dynamic memory cell comprising
a body including a support substrate, a first
insulating layer on said substrate, and a semiconductor layer
on said first insulating layer, said semiconductor layer
having a surface,
a storage node in said semiconductor layer abutting
said surface, and electrically isolated from said substrate by
said first insulating layer, said storage node having a net
dopant concentration of a first conductivity type,
a write bit line region abutting said surface and
spaced from said storage node, said write bit line region
having a net dopant concentration of said first conductivity
type,
a buried word line region abutting said surface and
positioned between and abutting said storage node and said
write bit line, said buried word line region having a net
dopant concentration of a second conductivity type,
a read bit line region abutting said surface and
said storage node opposite from said buried work line region,
said read bit line region having a net dopant concentration of
said second conductivity type,
a second insulating layer on said surface, and
a gate electrode on said second insulating layer
positioned over said storage node and said buried word line
region, said gate electrode functioning with said write bit
line region, said buried word line region, and said storage
node as a write transistor, and said gate electrode
functioning with said buried work line region, said storage
node, and said read bit line region as a read transistor.

2. The memory cell as defined by claim 1 wherein
said first conductivity type is n- type and said second
conductivity type is p- type.

11

1   3.   The memory cell as defined by claim 2 wherein
2 electrons from said buried word line region flow into said
3 storage node in writing into said cell and increasing
4 conductance of said read transistor.

1   4.   The memory cell as defined by claim 2 wherein
2 said storage node is charged with a positive voltage from said
3 write bit line region in writing into said cell and increasing
4 threshold voltage of said read transistor.

1   5.   The memory cell as defined by claim 4 wherein
2 said body comprises a silicon substrate with said first
3 insulating layer comprising silicon oxide and said
4 semiconductor layer comprising silicon.

1   6.   The memory cell as defined by claim 1 wherein
2 said body comprises a silicon substrate with said first
3 insulating layer comprising silicon oxide and said
4 semiconductor layer comprising silicon.

1   7.   A dynamic random access memory comprising an

2   array of memory cells arranged in rows and columns, each

3   memory cell comprising

4   a body including a supporting substrate, a first

5   insulating layer on said substrate, and a semiconductor layer

6   on said first insulating layer, said semiconductor layer

7   having a surface,

8   a storage node in said semiconductor layer abutting

9   said surface and electrically isolated from said substrate by

10   said first insulating layer, said storage node having a net

11   dopant concentration of a first conductivity type,

12   a write bit line region abutting said surface and

13   spaced from said storage node, said write bit line region

14   having a net dopant concentration of said first conductivity

15   type,

16   a buried word line region abutting said surface and

17   positioned between and abutting said storage node and said

18   write bit line, said buried work line region having a net

19   dopant concentration of a second conductivity type,

20   a read bit line region abutting said surface and

21   said storage node opposite from said buried work line region,

22   said read bit line region having a net dopant concentration of

23   said second conductivity type,

24   a second insulating layer on said surface, and

25   a gate electrode on said second insulating layer

26   positioned over said storage node and said buried word line

27   region, said gate electrode functioning with said write bit

28   line region, said buried word line region, and said storage

29   node as a write transistor, and said gate electrode

30   functioning with said buried word line region, said storage

31   node, and said read bit line region as a read transistor,

32   wherein said body of each memory cell comprises a

33   portion of a common substrate.

1   8.   The dynamic random access memory as defined by

2   claim 7 and including a conductive word line interconnecting

3   all gate electrodes of cells along a row, and at least one

4   conductive bit line interconnected to cells along a column.

9.   The dynamic random access memory as defined by
claim 8 and including switch means for selectively connecting
said at least one conductive bit line to all write bit line
regions in said column and to all read bit line regions in
said column.

10.   The dynamic random access memory as defined by
claim 8 and including a write bit line connected to all write
bit line regions in said column and a read bit line connected
to all read bit line regions in said column.

11.   A memory cell comprising
a body including a supporting substrate, a first
insulating layer on said substrate, and a semiconductor layer
on said first insulating layer, said semiconductor layer
having a surface,
a first region of a first conductivity type in said
semiconductor layer abutting said surface and electrically
isolated from said substrate by said first insulating layer,
a second region of said first conductivity type in
said semiconductor layer abutting said surface and spaced from
said first region,
a third region of a second conductivity type in said
semiconductor layer abutting said surface and positioned
between and abutting said first region and said second region,
a fourth region of said second conductivity type in
said semiconductor layer abutting said surface and abutting
said first region opposite from said third region,
a second insulating layer on said surface, and
a gate electrode on said second insulating layer
positioned over said first region and said third region, said
gate electrode functioning with said first region, said second
region and said third region as a write transistor in writing
electrical charge in said first region, and said gate
electrode functioning with said first region, said third
region, and said fourth region as a read transistor the
conductance of which is dependent on electrical charge stored
in said first region.

14

1   12.   The memory cell as defined by claim 11 wherein

2   said first conductivity type is n- type and said second

3   conductivity type is p- type.

1   13.   The memory cell as defined by claim 12 wherein

2   said first region is charged with a positive voltage from said

3   second region in writing into said cell and increasing

4   threshold voltage of said read transistor.

1   14.   The memory cell as defined by claim 12 wherein

2   electrons from said third region flow into said first region

3   in writing into said cell and increasing the conductance of

4   said read transistor.

1   15.   The memory cell as defined by claim 11 wherein

2   said body comprises a silicon substrate with said first

3   insulating layer comprising silicon oxide and said

4   semiconductor layer comprising silicon.
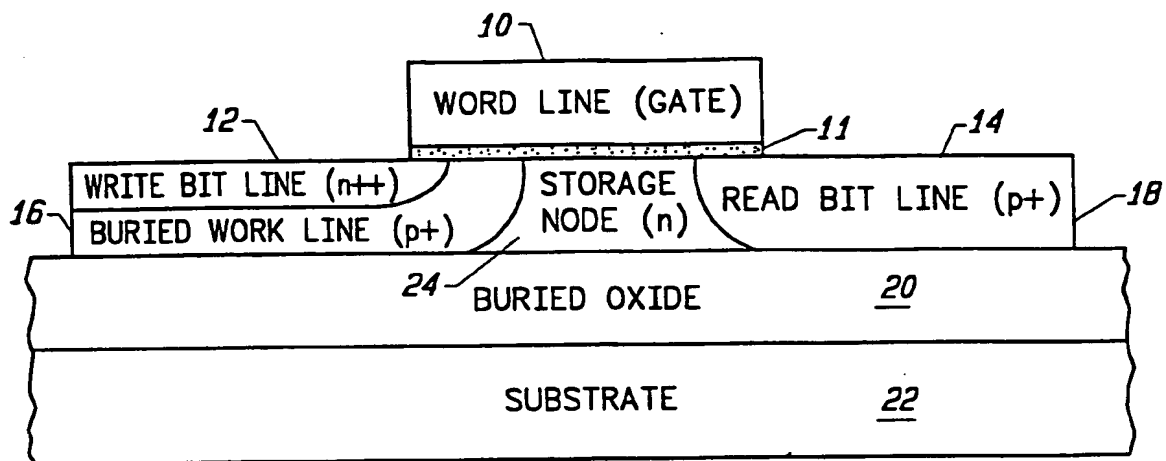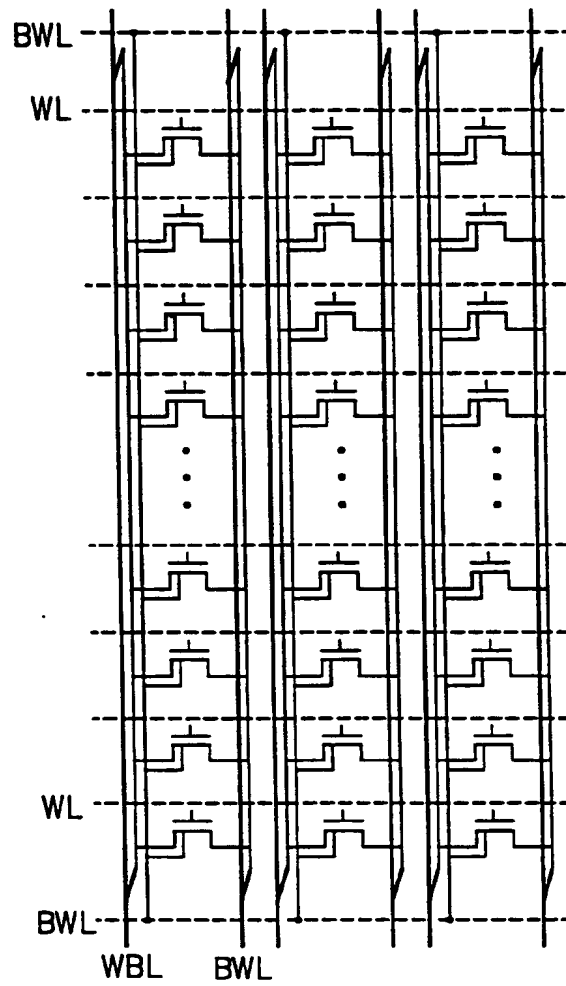
FIG. 1A
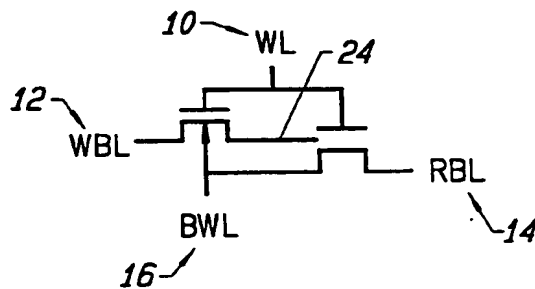
FIG. 1B
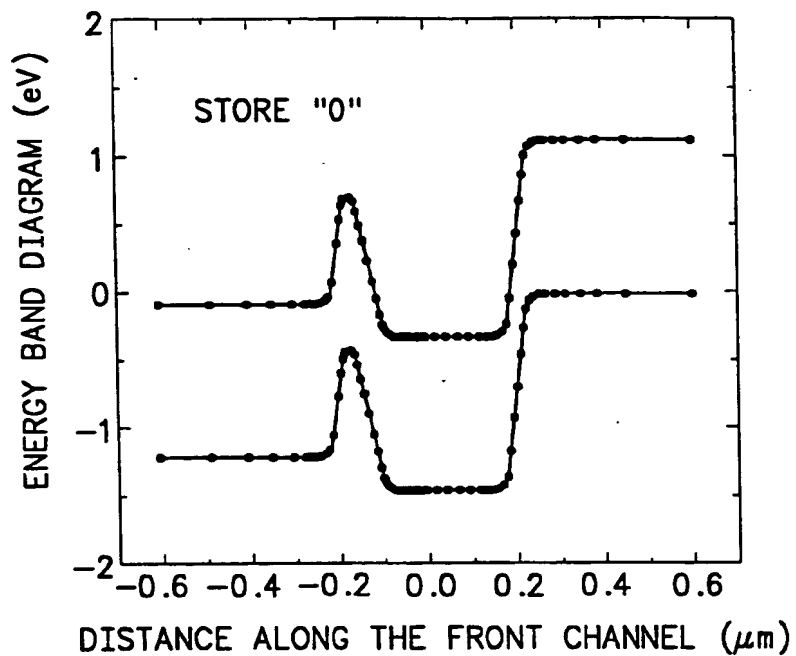
FIG. 2
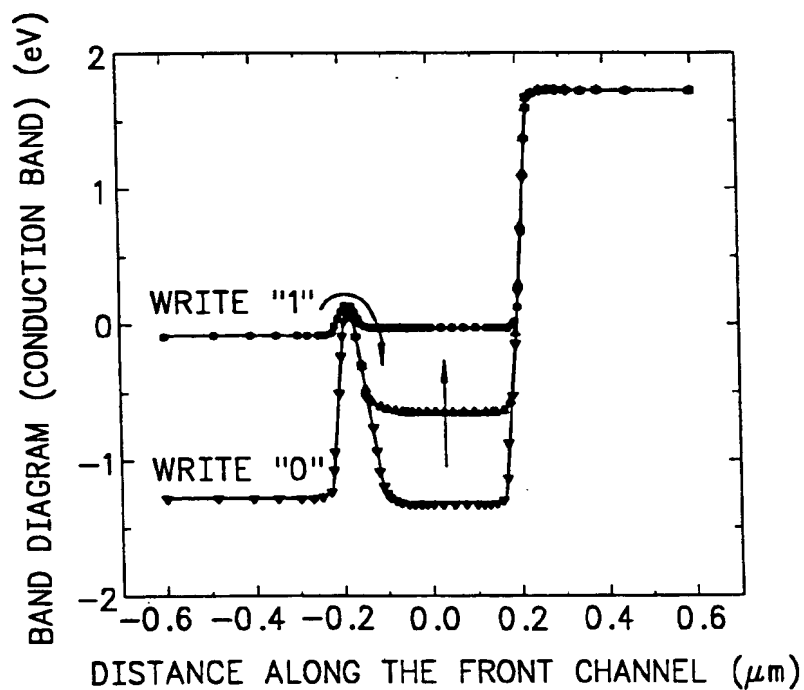
FIG. 3
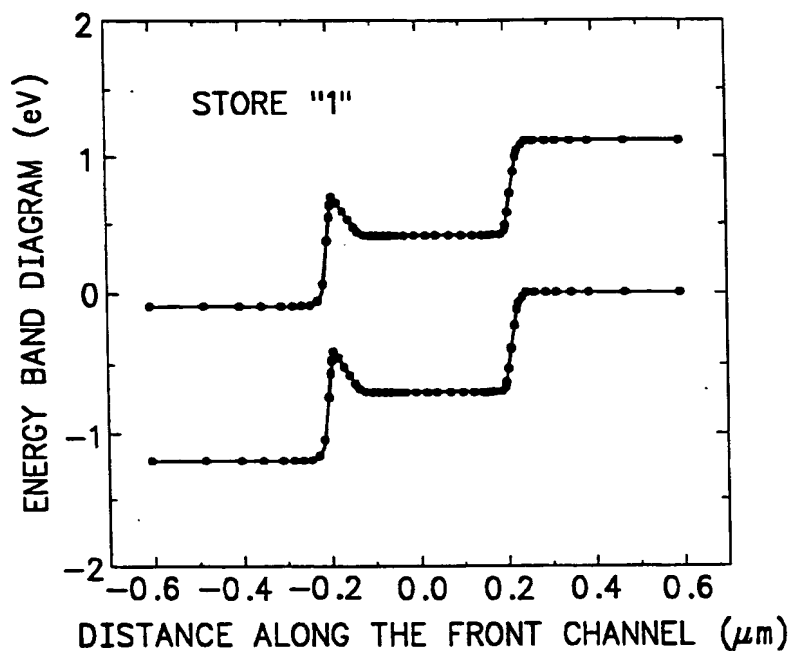
FIG. 4
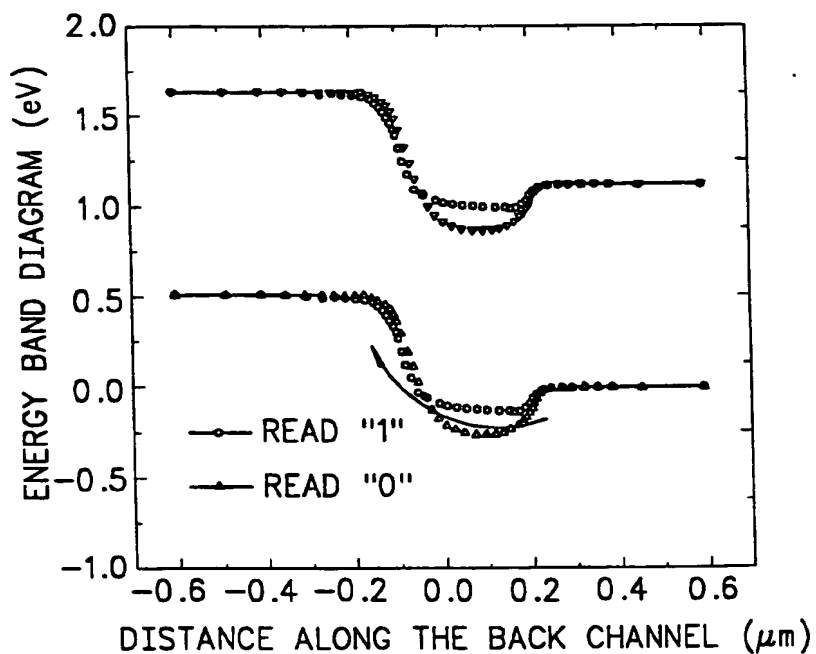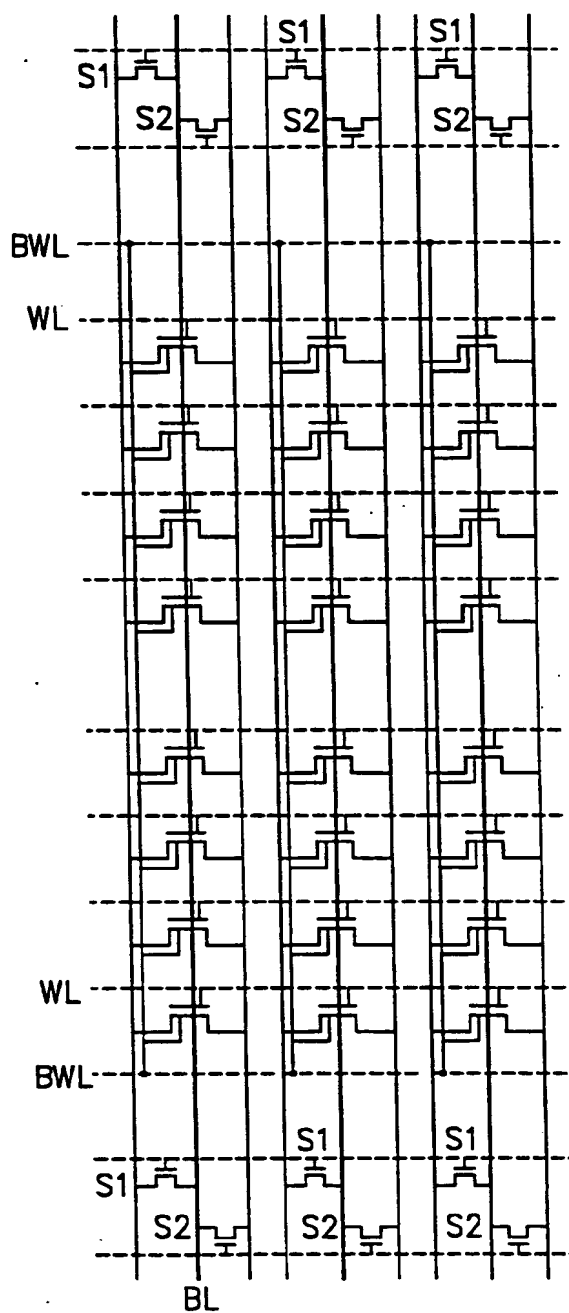

FIG. 5
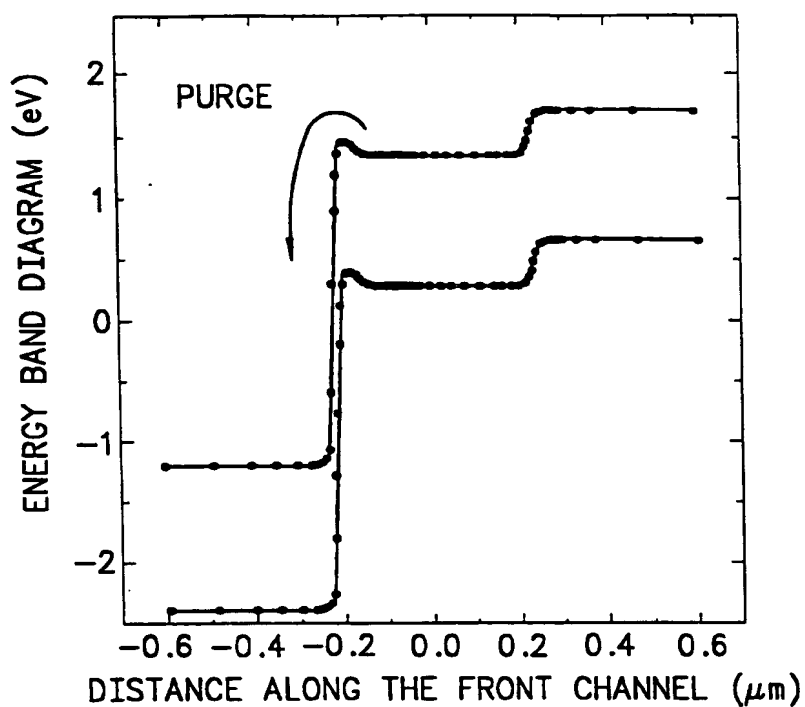
FIG. 6
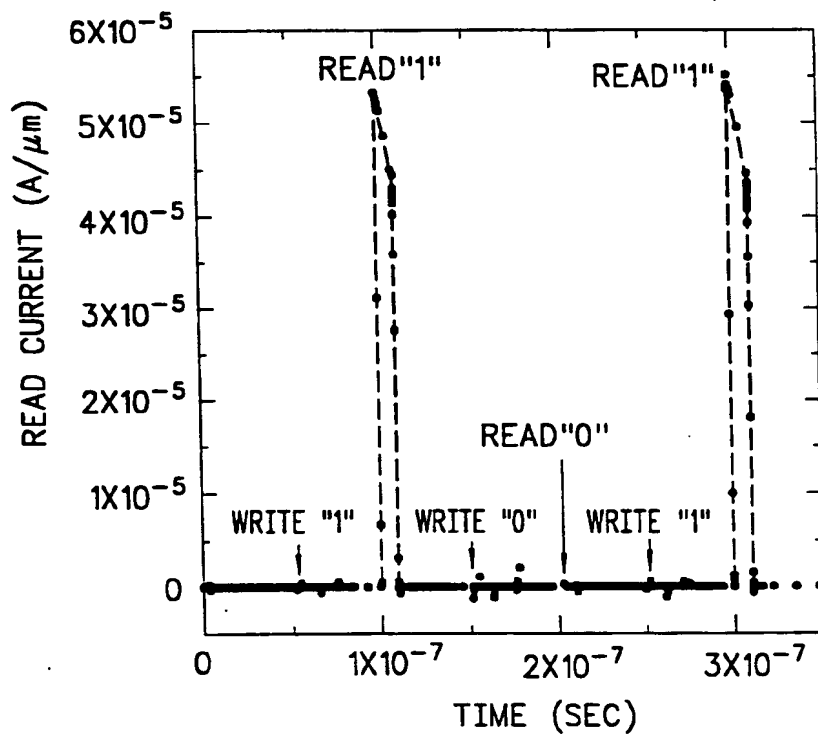
FIG. 7
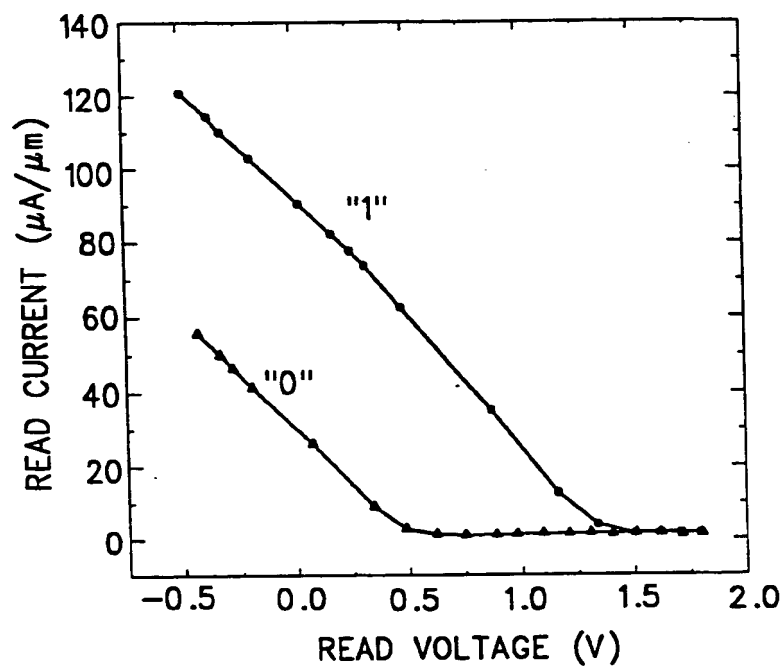
FIG. 8
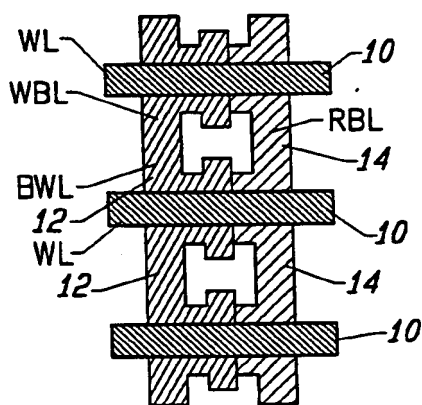
FIG. 9

FIG. 10

FIG. 11
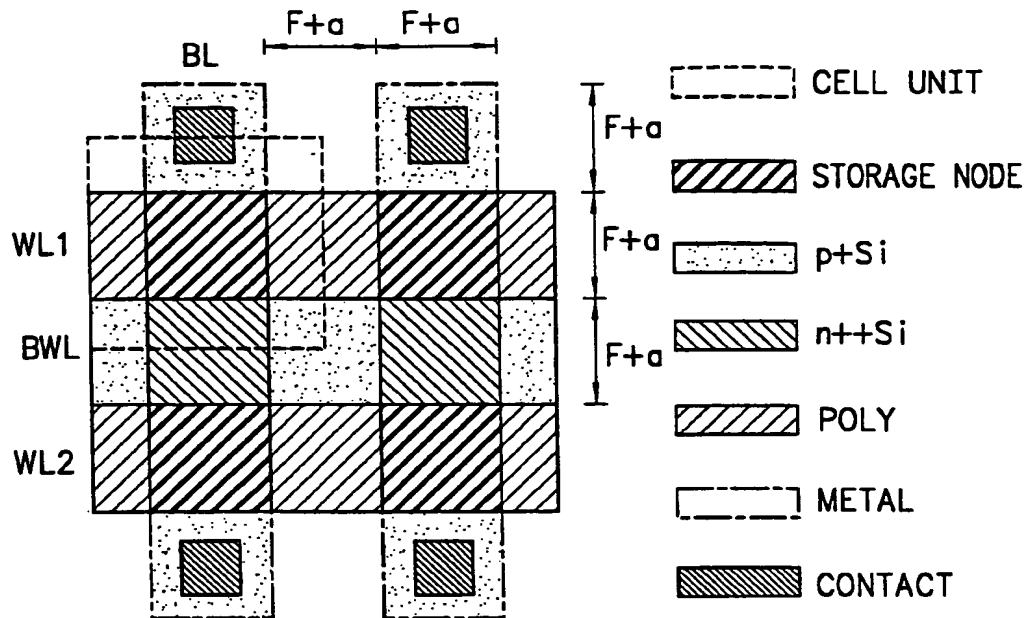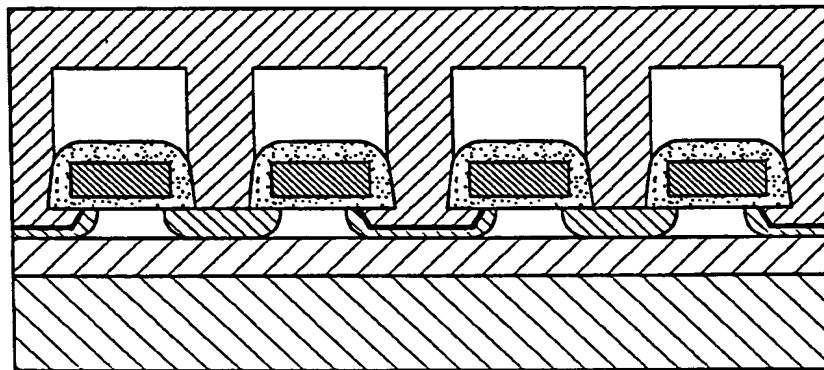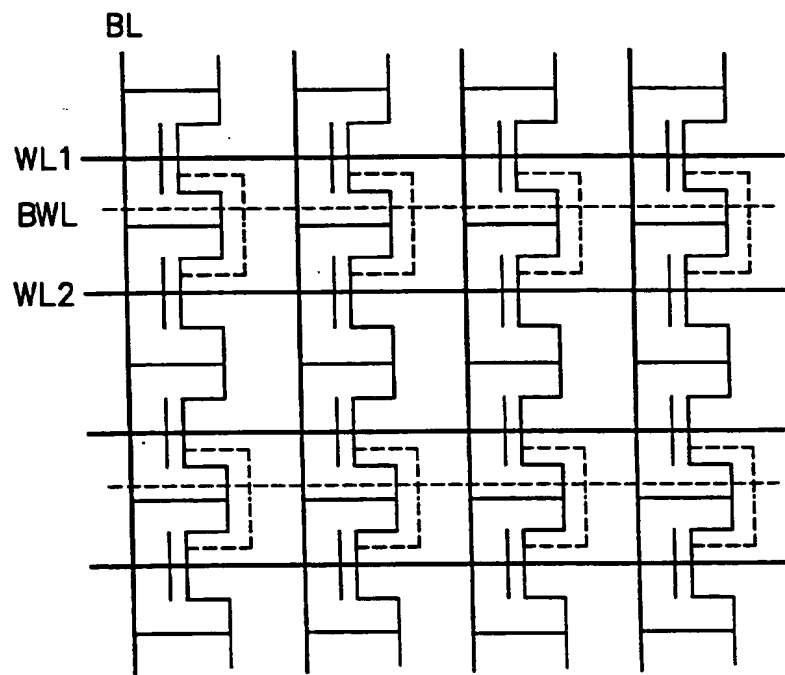
FIG. 12

FIG. 13

FIG. 14

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/13830

A. CLASSIFICATION OF SUBJECT MATTER
IPC(5) :G11C 11/40
US CL :365/150,182
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
U.S. : 365/150,182
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,090,254 (HO ET AL) 16 May 1978.	
X	US, A, 4,298,962 (HAMANO ET AL) 03 November 1981, col. 3, lines 55-68, and col. 6, lines 8-19.	1-15
A	US, A, 5,122,986 (LIM) 16 June 1992.	

☐ Further documents are listed in the continuation of Box C.   ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier document published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
20 JANUARY 1995	JAN 2 4 1995

Name and mailing address of the ISA/US	Authorized officer
Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	DO HYUN YOO
Facsimile No. (703) 305-3230	Telephone No. (703) 308-4908

Form PCT/ISA/210 (second sheet)(July 1992)★